

Natural flue draft gas fired storage water heater



Product details


TX300



ErP Ready



Low Emissions

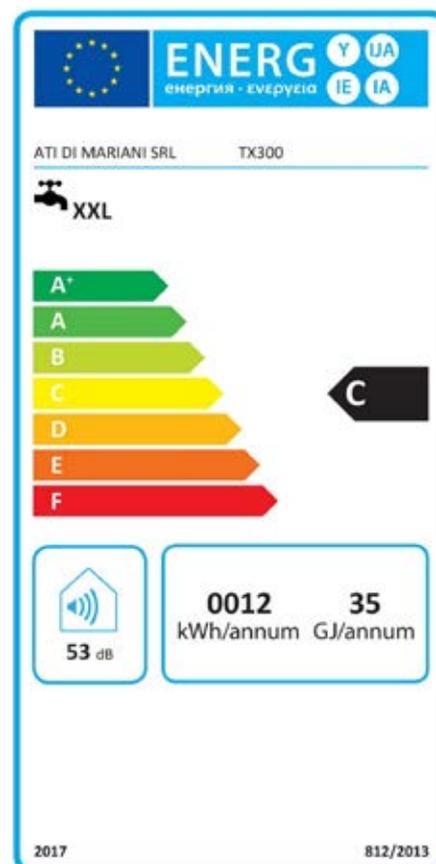

Methane

Code **TX300**

Price **€ 3.460,00**

Propane



Code **TX300P**

Price **€ 3.480,00**

Main characteristics

- Internal glazing
- Closed-cell polyurethane foam insulation
- Electronic ignition
- Corrosion protection with magnesium anode
- Adjustable thermostat and overheat safety thermostat
- Stainless steel multigas burner, natural gas or propane ready
- Flue gas safety thermostat
- Overpressure safety valve
- Inspection and cleaning flange

| Technical data | | |
|--|-------------------|-------------------|
| Storage capacity | L | 300 |
| Nominal input (gross) | kW | 24,00 |
| Nominal output (net) | kW | 20,88 |
| Warm up time ($\Delta T = 45^{\circ}\text{C}$) | min | 45 |
| Continuous water at 40°C | l/h | 718 |
| Draw-off capacity single withdrawal* | L | 600 |
| Methane consumption (G20)** | m ³ /h | 2,50 |
| Propane consumption (G31)** | kg/h | 1,90 |
| Max operating pressure | bar | 6 |
| Net weight | kg | 206 |
| Connections | | |
| Cold Water Inlet | F | G 1" 1/4 |
| Hot Water Outlet | C | G 1" 1/4 |
| Recirculation | R | G 1" 1/4 |
| Gas Inlet | G | G 1/2" |
| Exhaust fumes - concentric | S | / |
| Exhaust fumes - split | | $\varnothing 186$ |
| Packaging | | |
| Packages | n. | 2 |
| Wooden cage (l x w x h) - (weight) | cm - (kg) | 78x78x176 - (220) |
| Box (l x w x h) - (weight) | cm - (kg) | 68x68x250 - (6) |

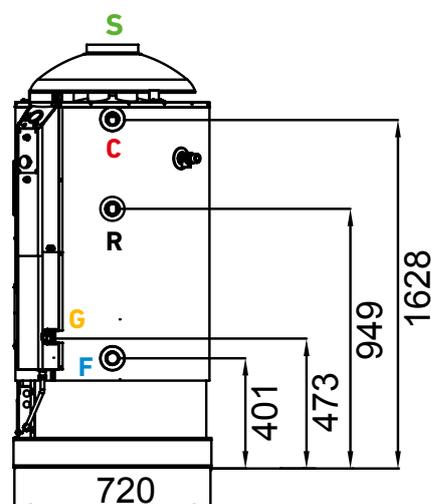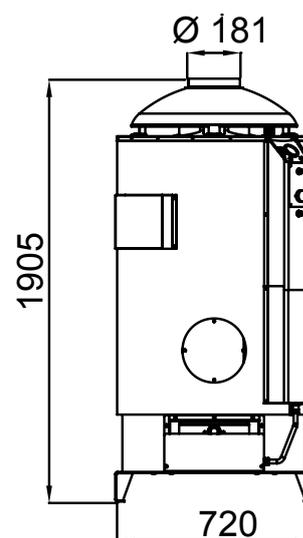

*Under standard conditions: T in 15°C , T out 40°C , T storage 65°C

** Under standard conditions: T in 15°C , 1013 mbar